



Poly-Cured Sheeting

Polycorp's Red Rubber cured sheeting is compounded from more than 95% natural rubber that exhibits outstanding resilience, strength and resistance to cutting, tearing and abrasion. Drawing from our experience with Grinding Mill Liners and other highly abrasive applications materials, Polycorp has developed a premium wear resistant rubber for sliding or wet abrasion service. Developed to outlast polyurethanes, steel alloys and even Nihard liners and components, resulting in significant cost benefits to the user.


Characteristics

- Excellent resistance to wet abrasion
- Very high resilience
- Remarkable cut and tear resistance
- Low Permanent set
- Resistance to a wide range of chemicals
- Excellent electrical resistance
- Sound absorption and vibration dampening properties
- All rolls buffed on one side
- Available with bonding layer



For more information or to place an order, call
1-800-265-2710

33 York St., Elora
 Ontario, Canada
 N0B 1S0
 Tel: 519-846-2075
 Fax: 519-846-2372
www.poly-corp.com

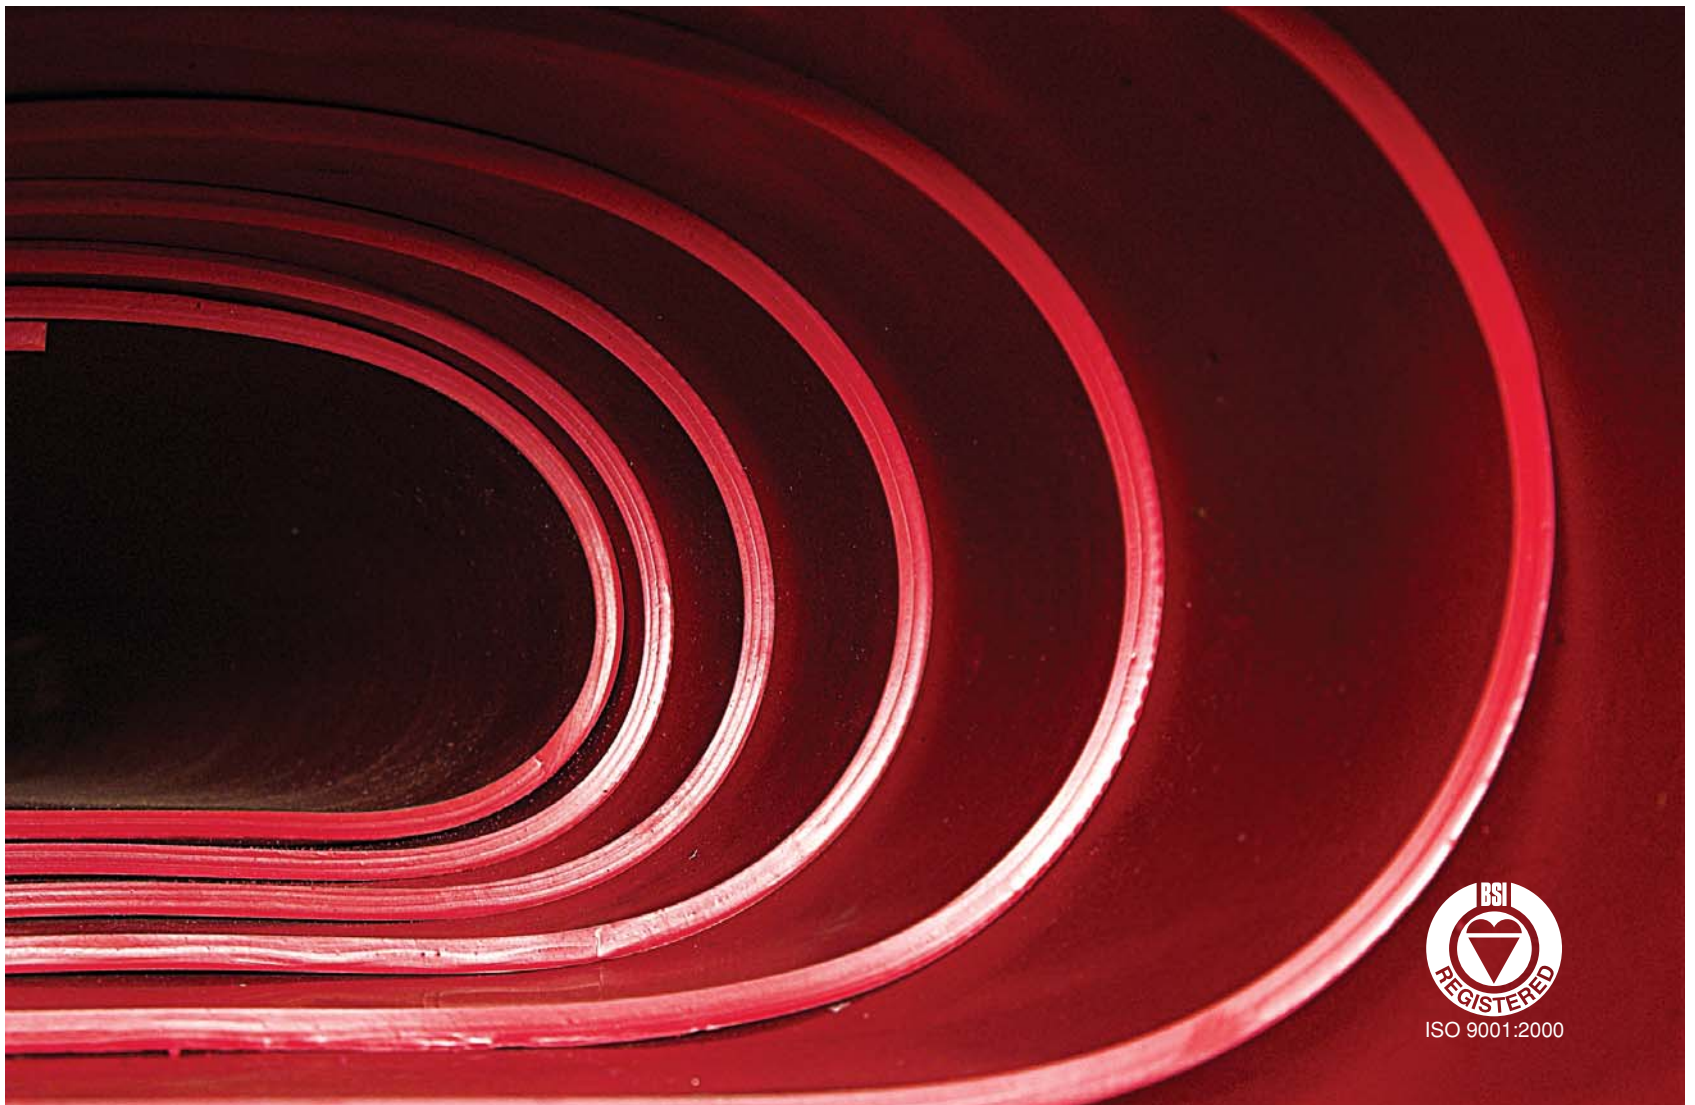

ISO 9001:2000



33 York St., Elora

Ontario, Canada

N0B 1S0

Tel: 519-846-2075

Fax: 519-846-2372

www.poly-corp.com

Ideal for Lining:

- Chutes
- Classifiers
- Screening
- Underpans
- Separators
- Pumps
- Valves
- Gaskets
- Pipes
- Hose
- Cyclones

Technical Specifications

Color	Red
Density (gr/cc)	0.98
Durometer (Shore A)	38
Tensile (PSI)	3400
Elongation (%)	800
Tear (lb./in. - min.)	185
DIN Abrasion* (mm ³)	80

Available Sizes

1/8"
 3/16"
 1/4"
 3/8"
 1/2"
 Custom sizes available



ISO 9001:2000